

(, TE - 1950)



 **SINKI ELECTRONICS CO., LTD.**

()

431-824

3 1038-13

TEL : (031) 384-2784

FAX : (031) 384-8897


1.	1
2.	1
3.	2
4.	2
4.1	2
4.2	3
4.3	4
5.	4
5.1	4
5.2	5
5.3	5
5.4	5
6.	5

1.

가
(1,950Hz)

가

2.

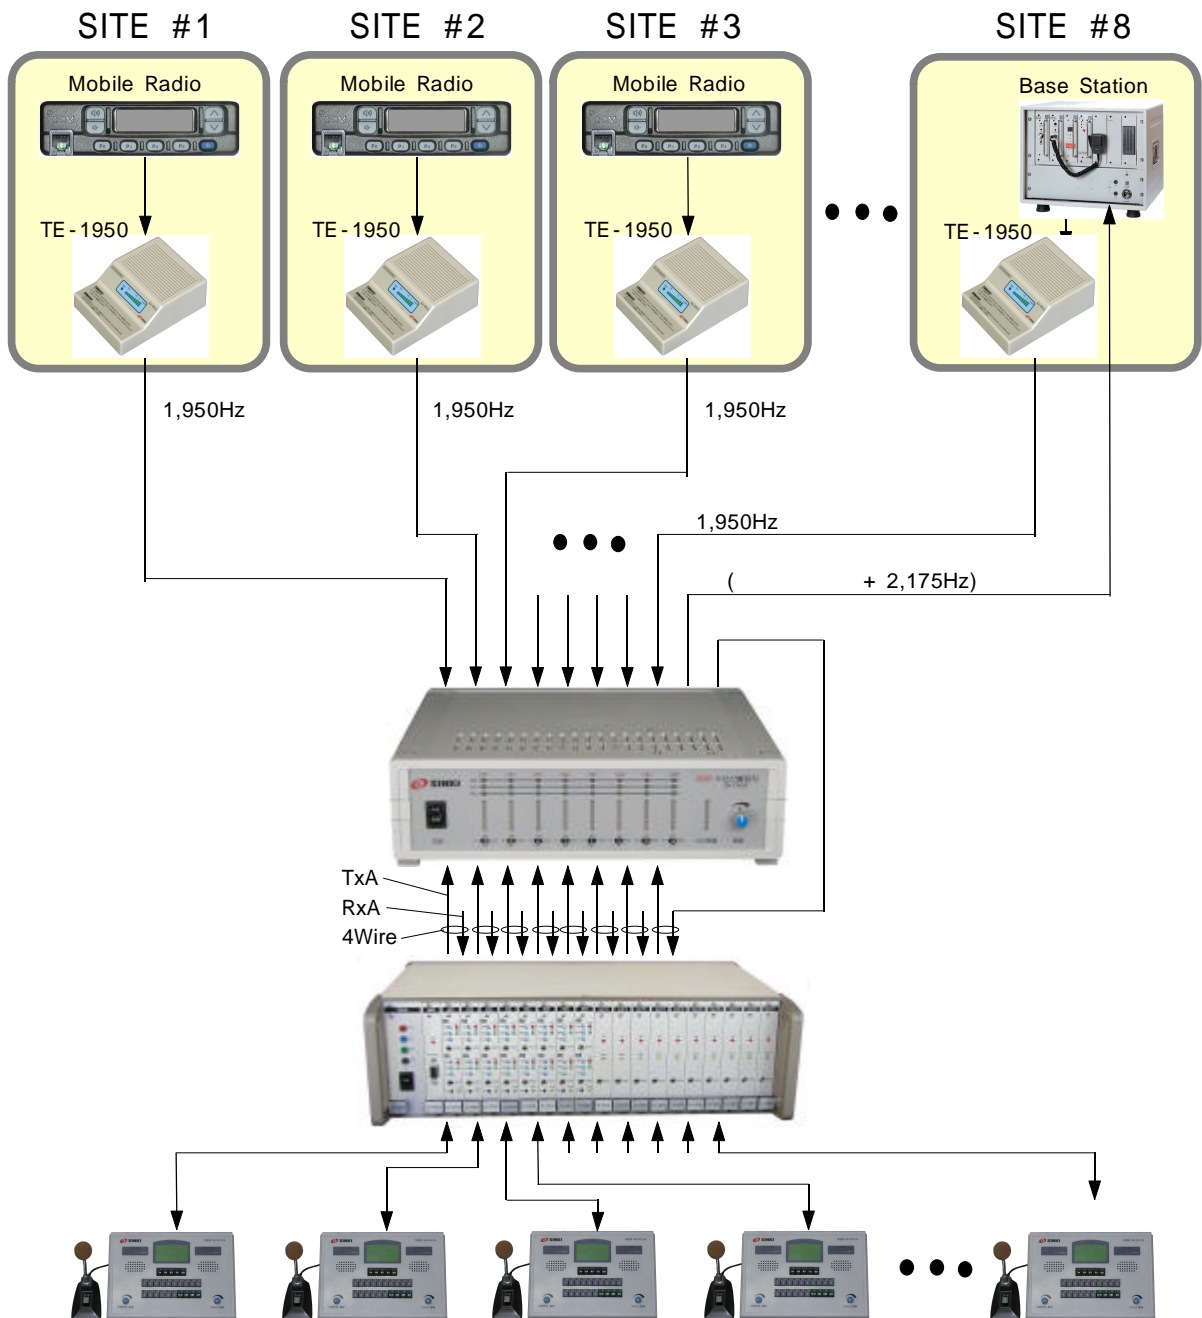

3.

- 1) 1,950Hz ,
 - 2) 가 .
 - 3) 가 .
 - 4) .
 - 5) .
 - 6) ,
- (WATCH-DOG) .


4.

4.1



: 가 .
:

4.2

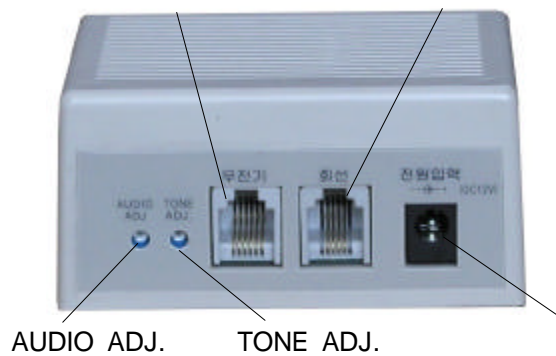


AUDIO ADJ. :

가 .

TONE ADJ. :


가 .

:



	(+12V~13.8V)	
	RX AUDIO INPUT	
	BUSY INPUT(Active Low, 가) (가) Active 가 , 가 , 1,950Hz 가)	
	GND	

:




:

(SK-RR10)


12V

(:

가 .)




4.2

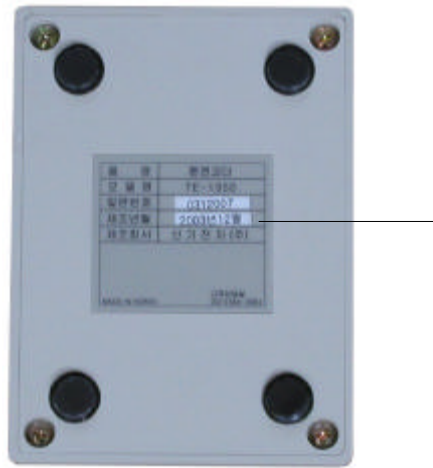

5.

5.1

AC , 110/220V
DC (TE-1950)

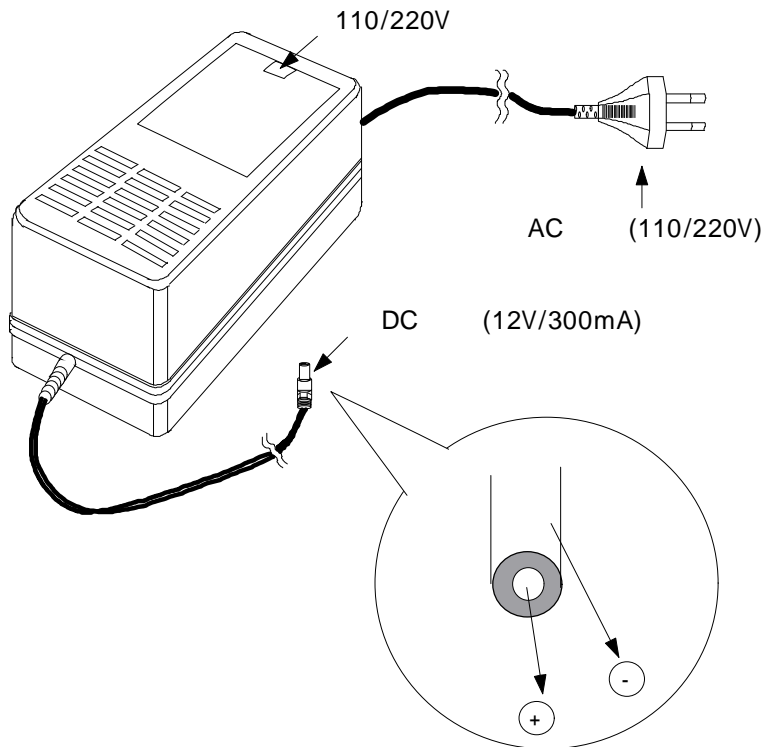

5.2

(TE - 1950)



5.3

4-2-

5.4

가

가 0dBm

AUDIO ADJ.

10dBm

TONE ADJ.

(

0dBm

.)

6.

1		1,950Hz
2		600 ±20% (@1KHz)
3		0 ±6 dBm (@600 , 1KHz)
4		20dB
5		-40dB
6	(WATCH-DOG)	
7		AC (:220V ±10% :DC12V/300mA)
8		85(W) x 40(H) x 115(D) (M/M)
9		0 ~ 50 , 20% ~ 90%